



# SIDEWALL DETAILS - CLAY 'S' TILE

MC-13

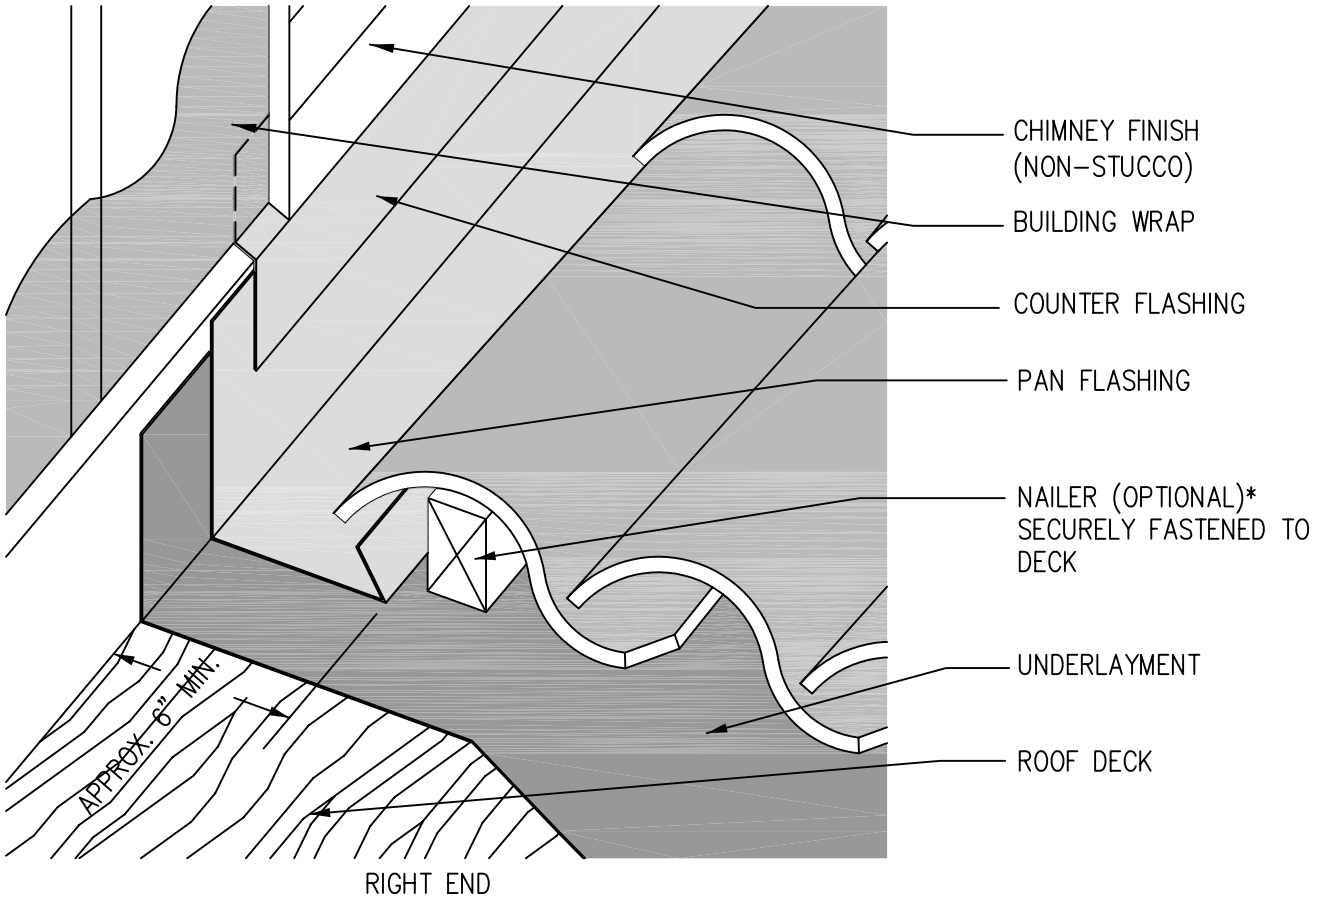

\*Note: Tiles to be installed in such a fashion as to prevent water diversion or blockage. Nail shall be of sufficient length to penetrate  $\frac{3}{4}$ " into or through the roof sheathing, whichever is less.

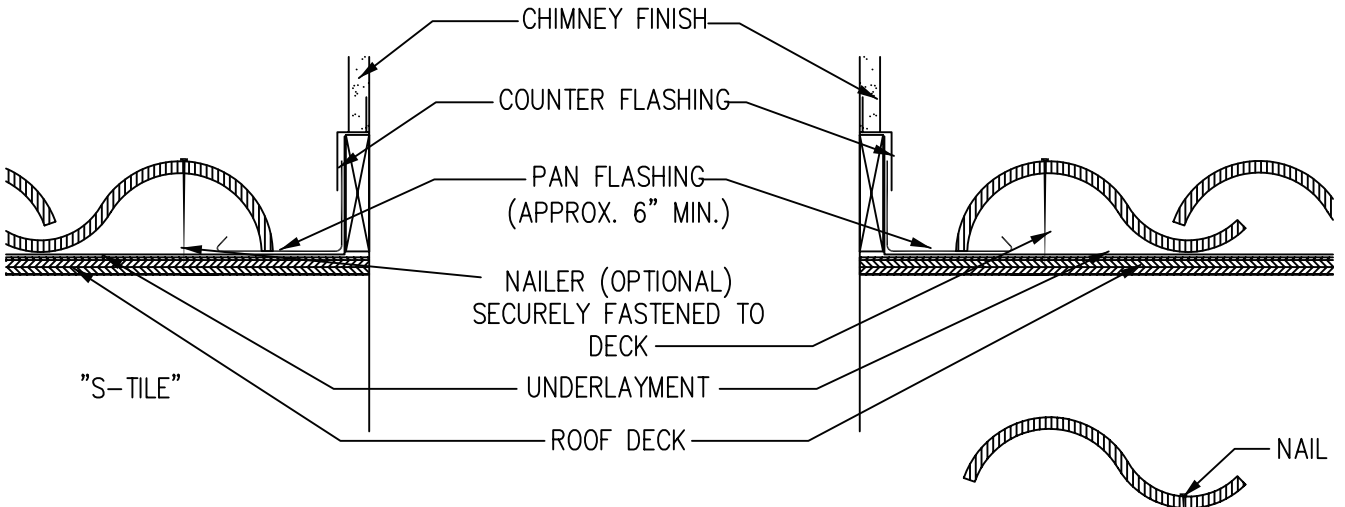

**Notes:**

1. Underlayment should extend a minimum of 4" up vertical wood blocking or wall.
2. See MC-12B for additional flashing details.

**Optional nailing location in tile pan.**

DRAWING SHOWN DEPICTS THE APPLICATION OF ALL TILE PROFILES. UNLESS OTHERWISE NOTED IT WOULD APPLY TO EITHER CONCRETE OR CLAY TILES.

Copyright© Tile Roofing Institute/WSRCA  
ICC-ES ESR-2015 01/2002, revised 04/2006

USA Owned. USA Made.  
www.eagleroofing.com

