


RAKE TILE INSTALLATION

MC-19B

FOR ADDITIONAL FASTENING IN REGIONS SUBJECT TO EXCESSIVELY HIGH WINDS OR SNOW ACCUMULATION, A MINIMUM 1" DAB OF CODE APPROVED ADHESIVE IS RECOMMENDED AT OVERLAP

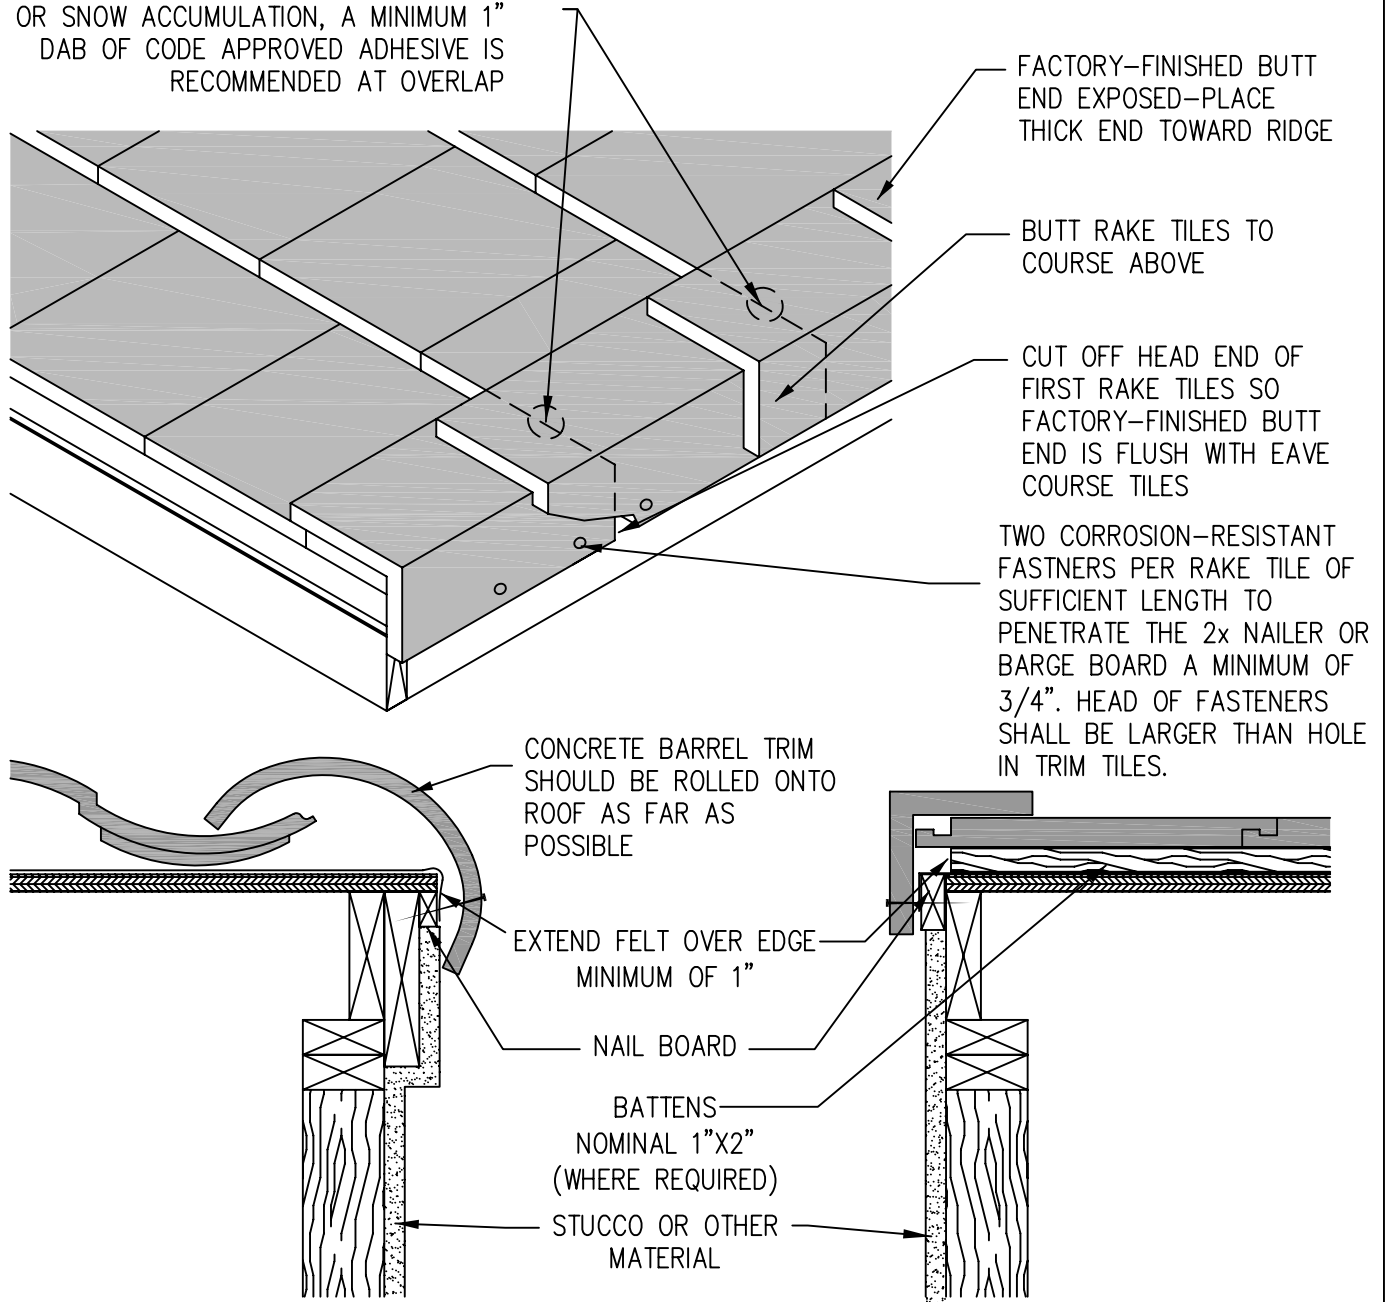

Notes:

1. Dimensions shown are minimums and are intended to be approximate to allow for reasonable tolerances due to field conditions.
2. See Footnote 4 Table 1A for additional fastening instructions.
3. Rake tiles must be be fastened into a minimum nominal 2" gable facia or equivalent in dimension.
4. The fasteners must penetrate a minimum of 3/4" into dimensional wood lumber.

Drawing shown depicts the application of all tile profiles. Unless otherwise noted it would apply to either concrete or clay tiles.