


VERTICAL BATTENS FOR STANDARD VALLEY AND HIPS

MC-06A

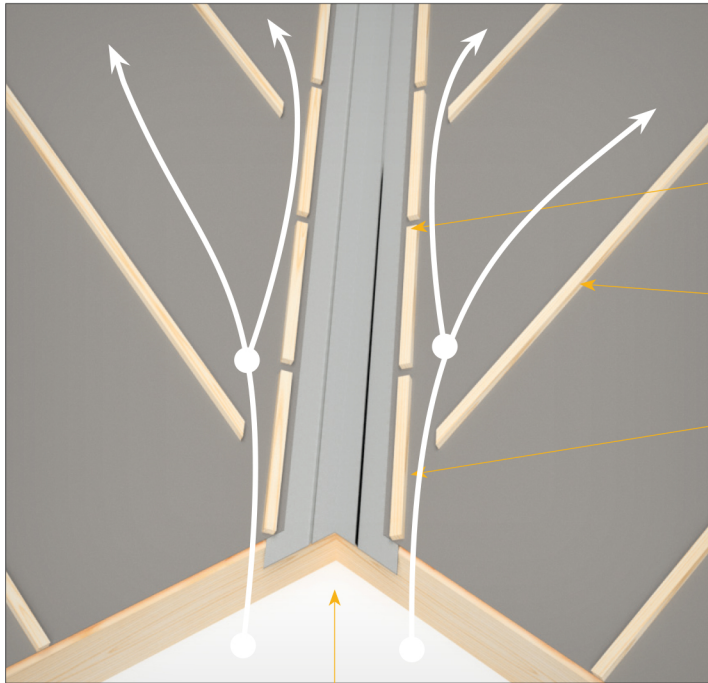

BATTENS WITH 2" GAPS FOR AIR FLOW AND DRAINAGE AT MIN 48" O.C.

VERTICAL BATTEN

PROVIDE MINIMUM 2" GAP FOR AIRFLOW AND DRAINAGE

REFER TO MC-03A FOR OVERLAPPING UNDERLAYMENT

REFER TO MC-17B FOR FINISH DETAIL

VALLEY FLASHING

(EXTEND ENTIRE WIDTH OF VALLEY METAL BEYOND ROOF EDGE EQUAL TO OVERHANG OF TILE)

NOTES:

1. For recommended underlayment and fastening, see Page 13, Table 1A, 1B & 1C
2. Horizontal battens shall be not less than 1" x 2" or code approved equal.
3. Consideration should be given to climate and roof orientation to determine if it is beneficial to specify/use vertical battens over underlayment, with horizontal battens secured over vertical battens.
4. See Table and Table for additional considerations.

Drawing shown depicts the application of all tile profiles. Unless otherwise noted, it would apply to either concrete or clay tiles.