

MC-25C

SPECIALTY INSTALLATIONS— PRE ENGINEERED ROOF

Installation on Metal Deck—Considerations
Adhesive Based Systems—Solid Sheathing

FOR INFORMATIONAL PURPOSES ONLY—THESE HAVE NOT BEEN EVALUATED BY UNIFORM ES.

SELF-ADHERING UNDERLAYMENT
COMPATIBLE WITH SUBSTRATE

TILES FASTENED ACCORDING TO
ADHESIVE MANUFACTURERS CODE
APPROVED INSTRUCTIONS


RIGID SHEATHING TO SUPPORT
UNDERLAYMENT MAY BE PLYWOOD OR
NON-COMBUSTIBLE SUBSTRATE AS
APPROVED BY LOCAL BUILDING OFFICIAL

EAVE RISER OR BIRD STOP

PERIMETER DRIP EDGE FLASHING

METAL DECK

FOR FIRE-RATED SYSTEMS, ADDITIONAL
COMPONENTS MAY BE REQUIRED

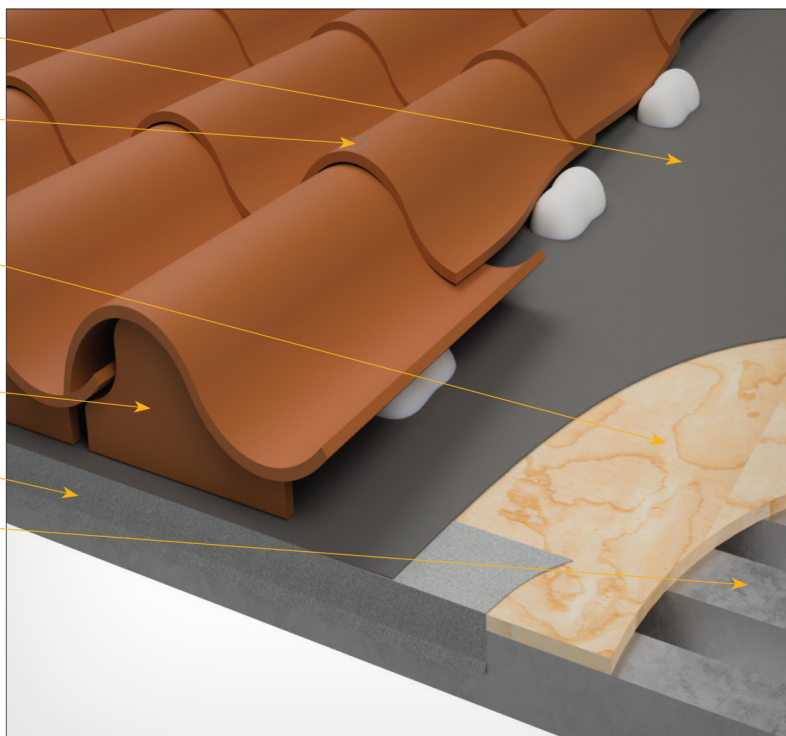

NOTE: ADHESION OF UNDERLAYMENT TO SUBSTRATE SHALL BE IN ACCORDANCE WITH ASSEMBLIES RECOGNIZED IN A CURRENT ICC-ES EVALUATION REPORT FOR ROOF TILE ADHESIVES EVALUATED TO THE REQUIREMENTS OF AC-152.

The pre-engineered roof systems are included for informational purposes only and are not recognized under evaluation reports for roof tiles

NOTES:

1. On Type I (Non-Combustible) building, all components must be fire-resistant as approved by local building official.
2. Dimensions shown are minimums and are intended to be approximate to all for reasonable tolerances due to field conditions.

Drawing shown depicts the application of all tile profiles. Unless otherwise noted, it would apply to either concrete or clay tiles.