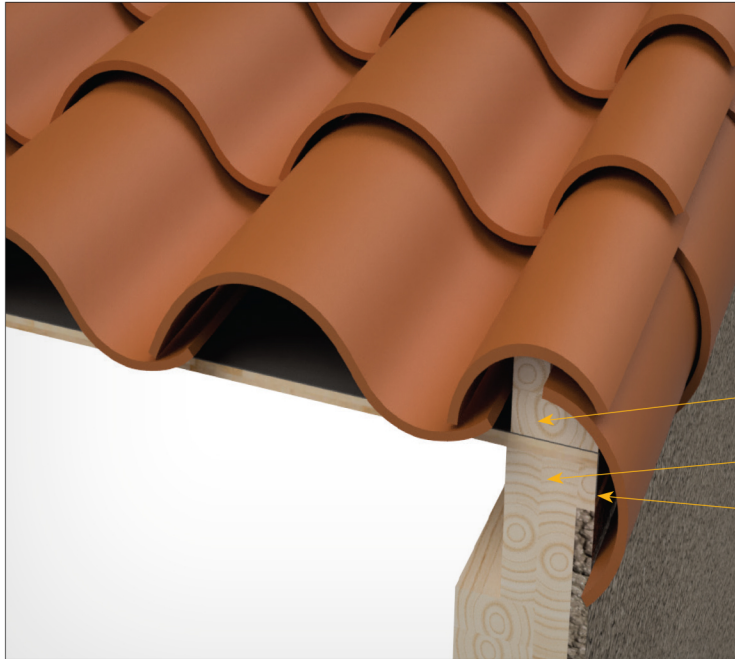


RAKE TILE INSTALLATION—BARREL TILE

MC-20A

EAVE DRIP EDGE FLASHING
NOT SHOWN FOR CLARITY


NOMINAL 2" X 3" OR 2" X 4" NAILER

NOMINAL 2" X 2" NAILER

UNDERLAYMENT

HIGH PROFILE TILE

OPTIONAL: PAN OR STRAW NAIL

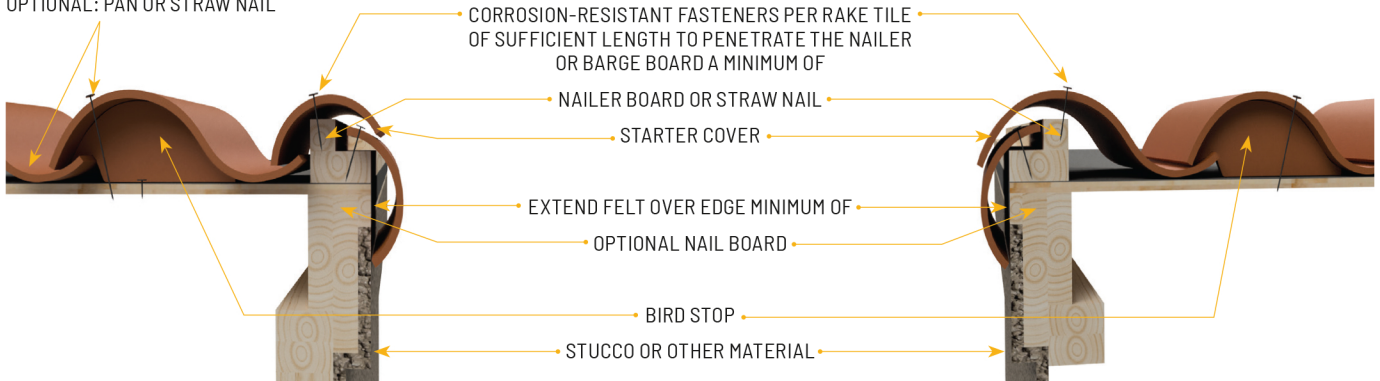CORROSION-RESISTANT FASTENERS PER RAKE TILE
OF SUFFICIENT LENGTH TO PENETRATE THE NAILER
OR BARGE BOARD A MINIMUM OF

NAILER BOARD OR STRAW NAIL

STARTER COVER

EXTEND FELT OVER EDGE MINIMUM OF

OPTIONAL NAIL BOARD

BIRD STOP

STUCCO OR OTHER MATERIAL

NOTES:

1. Dimensions shown are minimums and are intended to be approximate to all for reasonable tolerances due to field conditions.

Drawing shown depicts the application of all tile profiles. Unless otherwise noted, it would apply to either concrete or clay tiles.