


DOUBLE LAP TILE (NON-INTERLOCKING)

MC-10D

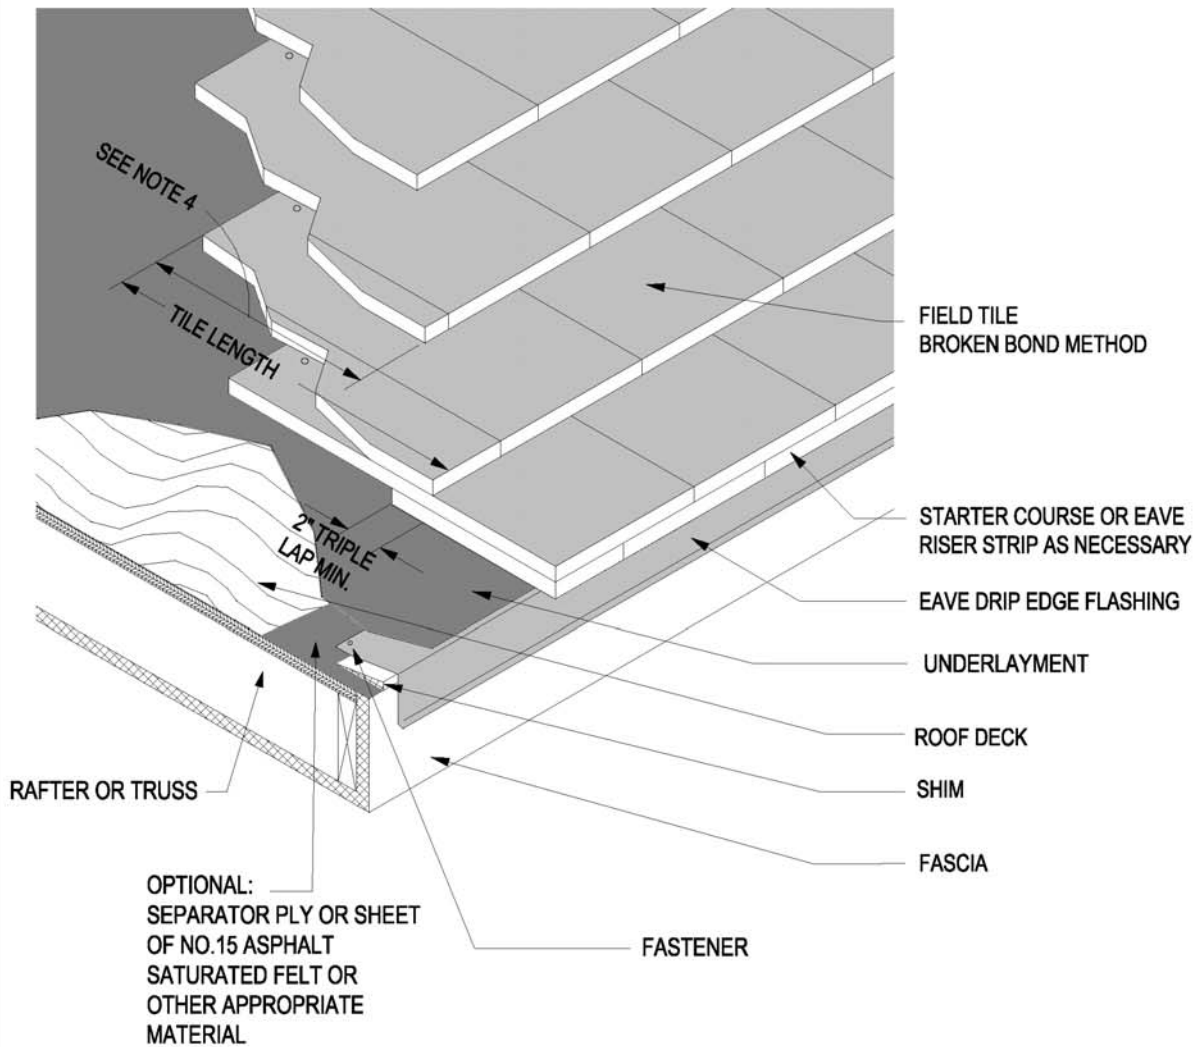

OPTIONAL:
SEPARATOR PLY OR SHEET
OF NO.15 ASPHALT
SATURATED FELT OR
OTHER APPROPRIATE
MATERIAL

Notes:

1. For recommended underlayment and fastening requirement, see Table 1A and 1B.
2. A eave drip edge flashing is required at all down slope perimeter edges.
3. Dimensions shown are minimums and are intended to be approximate to allow for reasonable tolerances due to field conditions.
4. Standard head lap equal to tile length minus 2" divided by 2.

Drawing shown depicts the application of all tile profiles. Unless otherwise noted it would apply to either concrete or clay tiles.

Appendix A