



SIDEWALL DETAILS - TWO PIECE CLAY

MC-13A

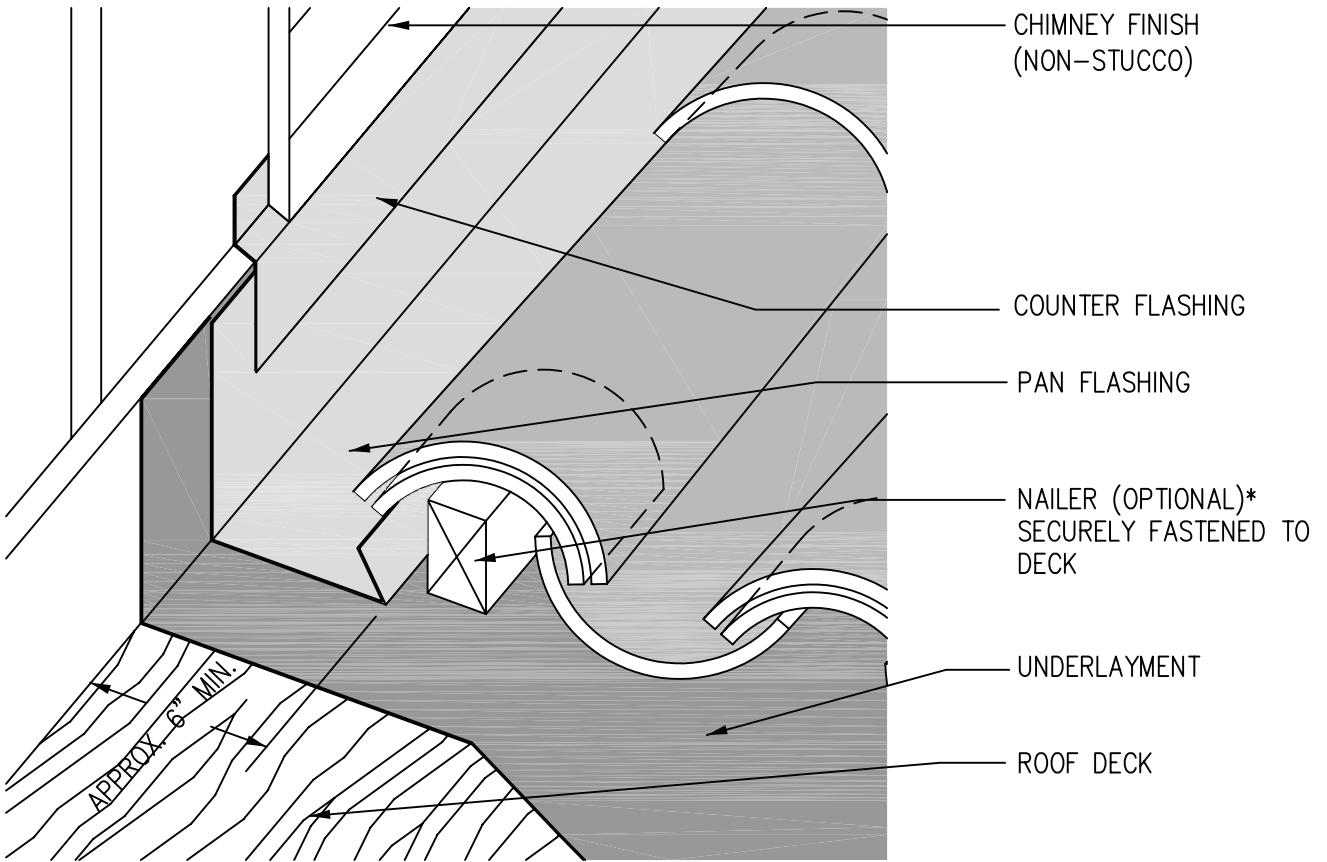

RIGHT END

*Note: Tiles to be installed in such a fashion as to prevent water diversion of blockage. Nails shall be of sufficient length to penetrate $\frac{3}{4}$ " into, or through the roof sheathing, which ever is less.

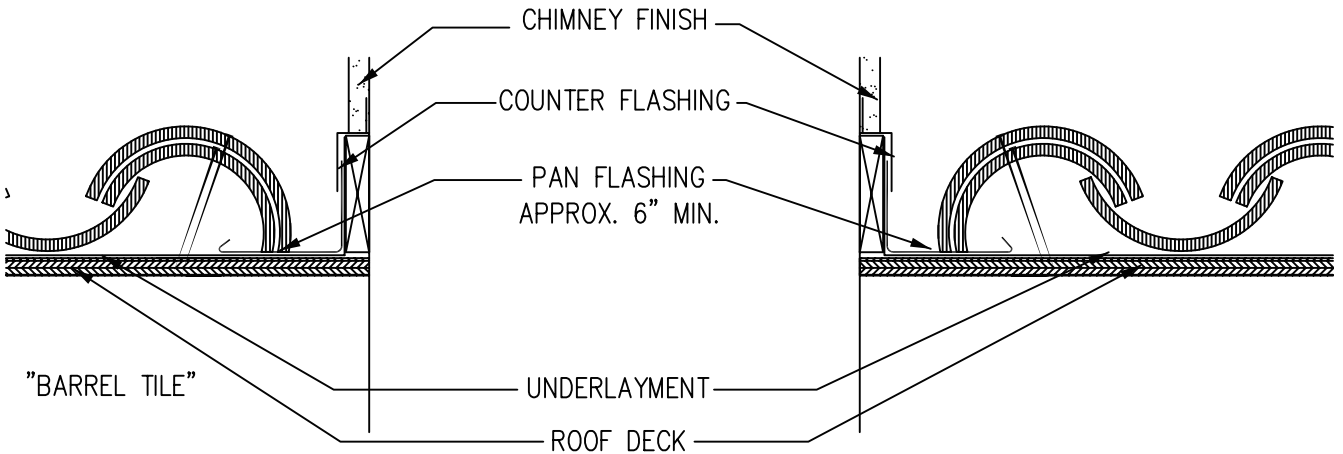

Notes:

1. Underlayment should extend a minimum of 4" up vertical wood blocking or wall.
2. See MC-12B for additional flashing details.

DRAWING SHOWN DEPICTS THE APPLICATION OF ALL TILE PROFILES. UNLESS OTHERWISE NOTED IT WOULD APPLY TO EITHER CONCRETE OR CLAY TILES.

Copyright© Tile Roofing Institute/WSRCA
ICC-ES ESR-2015 01/2002, revised 04/2006

USA Owned. USA Made.
www.eagleroofing.com

