
# Installation Guide Ted Capistrano EAGLE ROOFING PRODUCTS





Installation Guide




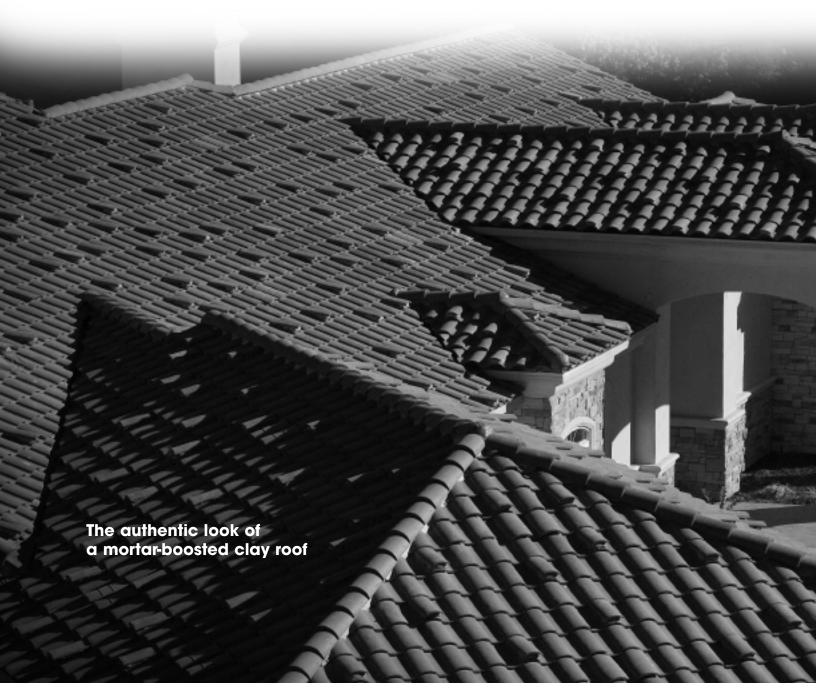



## Installation Recommendations OSUCIO

Boosted Capistrano can be installed along with Capistrano field tile or after the field tile is installed. This flexibility of application makes it ideal for retrofitting an existing roof or installing on a new construction project.



#### **Installing with Field Tile**

#### Separating the cap piece from the booster piece:

Eagle Boosted Capistrano is shipped with the larger Cap piece and smaller Booster piece attached to each other. Using a hammer or other striking instrument, gently tap each corner of the outside score-line between the cap and booster piece until the pieces separate.




#### Use of Cap and Booster:

The larger Cap piece is used for Boosting the Capistrano tile and the smaller Booster piece may be used for hip stacks or as an additional boost as needed or desired.



#### Securing the metal clip to the field tile:

Secure the upper end of the wire clip by hooking it on to the upper end of the barrel of the field tile.

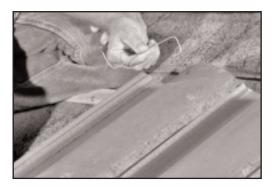

#### Attach the cap to the wire clip:

Slip the cap onto the wire clip through the pre-drilled hole.



#### **Installing with Field Tile** (continued)

#### Securing the metal clip to the cap:

Bend up the end of the wire to secure it firmly to the cap.



#### **Application of mortar:**

Place an adequate amount of mortar on the lower end of the field tile barrel. (A roofing adhesive can be used along with mortar in high wind installations.)

Note: Pre-soaking Boosted tiles in water helps improve adhesion.



#### **High Wind Applications:**

Mortar and a roofing adhesive can be used in high wind applications.



#### Secure the cap:

Tap the end of the cap to ensure that it forms a seal with the mortar.



#### **Installing after Field Tile**


#### Field tile installation:

Capistrano field tiles are to be installed as per the TRI (Tile Roofing Institute) Installation Manual.



#### **Application of mortar:**


Place an adequate amount of mortar on the lower end of the field tile barrel. (A roofing adhesive can be used along with mortar in high wind installations.)





### **Installation Notes for High Wind Application**

- A. In high wind applications it is recommended that a mortar compatible adhesive be used in conjunction with the mortar itself.
- **B.** Adhesives used must be tested and approved by the prevailing code body.
- 2. Please note: It is the responsibility of the applicator to ensure an effective bond occurs between all tile components and that the roof is installed according to the appropriate roofing/building codes and best practices.
- 1. Eave course installation: It is recommended that the entire eave course be Boosted for a finished appearance.

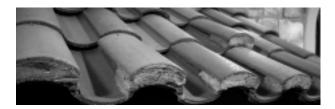

2. Applications: Ask your Roofer or Architect about additional application styles and techniques.







10% application

20% application

30% application

#### PRODUCTS E A G L E R O O F I N G



#### Manufacturing and Showrooms

Southern California Northern California Southwest 2352 N. Locust Ave. 4555 S. McKinley 4602 W. Elwood 1575 E. C R 470 Rialto, CA 92377 Stockton, CA 95206 Phoenix, AZ 85043 Sumterville, FL 33585 Phone 800 300 3245 Phone 800 998 3245 Phone 800 346 5260 Phone 877 300 3245 Fax 909 854 7181 Fax 209 234 4366 Fax 602 442 8841 Fax 877 300 3248

Boca Raton, Florida 3100 NW Boca Raton Blvd. 402 S. North Lake Blvd.

Suite 401 Boca Raton, FL 33431 866 62 EAGLE (3 2453) Fax: 561 347 8181

Orlando, Florida Suite 1028 Altamonte Springs, FL 32701 407 691 7100

Fax: 407 691 5117

Southern California Irvine, CA 92614

Fax 949 553 9556 Fax 916 789 8746

Northern California 17875 Sky Park N. (F) 9001 Foothills Blvd. (#120) 4555 S. McKinley Roseville, CA 95747 Phone 949 553 8333 Phone 916 789 4555

Northern California Stockton, CA 95206 Phone 209 932 2700 Fax 209 234 4366

Design Centers