

SECURE ROLL™

FLEXIBLE FLASHING





SECURE TILE ROOF™
COMPONENTS
by Eagle Roofing Products

Eagle Roofing Products has partnered with our friends at Plioseal™ to provide you with the highest quality flexible flashing in the market. Secure Roll is made with a tough two layer EPDM surface that is non-toxic and lead-free, and cleverly created to withstand rain, wind, sun and snow.

Application Instructions

Ensure that the surface the Secure Roll will be adhered to is reasonably clean and dry.

- Cut the Secure Roll product to a length that is manageable to handle. Take into account the number of people handling the product, jobsite conditions and the fully adhered nature of the product.
- Remove the release film from the side of the Secure Roll that will be adhered first.
- Carefully adhere the Secure Roll to the desired surface and press firmly to ensure full adhesion. For some installations, a silicone roller may make this step easier.
- As necessary on vertical surfaces, use mechanical fasteners to hold the Secure Roll in place.
- Lift the side with the remaining release film and ensure that the second surface is reasonably clean and dry.
- Remove the remaining release film.
- Carefully adhere the Secure Roll to the desired surface and press firmly to ensure full adhesion. For some installations, a silicone roller may make this step easier.
- When multiple pieces of Secure Roll are used to flash one length, the pieces should overlap at least 2 inches.

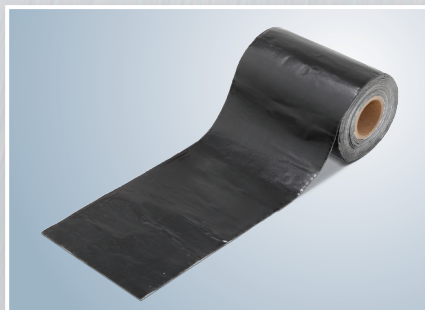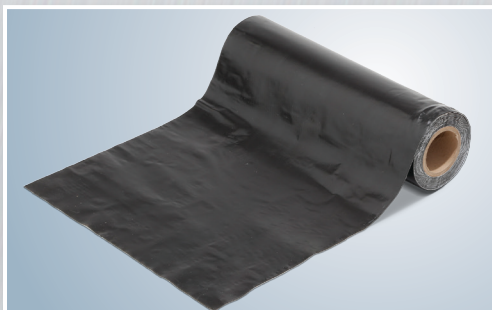

1-888-TILE ROOF

For more information on Eagle's Secure Roll, contact your local Account Representative or visit eagleroofting.com

Connect with us!

