

DUAL DEFENSE: FIRE RATED. WATER TIGHT.



**SECURE ROOF
COMPONENTS™**
by Eagle Roofing Products

EAGLE ANCHOR XFR™
BY **POLYGLASS®**

Eagle Anchor XFR by Polyglass® is an exceptional underlayment engineered for defense against both fire and water intrusion. Featuring a durable plastomeric top layer, a self-sealing SBS modified bottom layer, and patented Burn-Shield Technology® that passes industry standard fire testing, Eagle Anchor XFR delivers superior protection for fire hazard severity zones.

Ideal for use beneath clay and concrete tile roof systems, Eagle Anchor XFR is a cost-effective option providing Class A Assembly fire protection and water resistance in a single layer—eliminating the need for multiple products to meet WUI codes or additional performance requirements.



Features & Benefits

- Patented Burn-Shield Technology® by Polyglass® provides superior ember resistance
- Meets California Building Code requirements—Class A Fire Rated underlayment for WUI (Wildland Urban Interface)
- Class A Assembly under multiple steep-slope roofing products*
- Fiberglass mat provides increased strength and ability to withstand incredibly high temperatures
- Mineral aggregate surface engineered for superior anti-slip surface
- Water-resistant modified asphalt compound
- 2 square roll size
- Up to 180-day exposure
- Standard 10-Year Limited Material Warranty by Polyglass® or a 10-year Labor & Material Warranty when installed by a Polyglass Registered Contractor

Choose Eagle Anchor XFR for powerful, single-layer protection you can trust.




connect with us!



eagleroofting.com



Save Time & Money with Single-Layer Strength

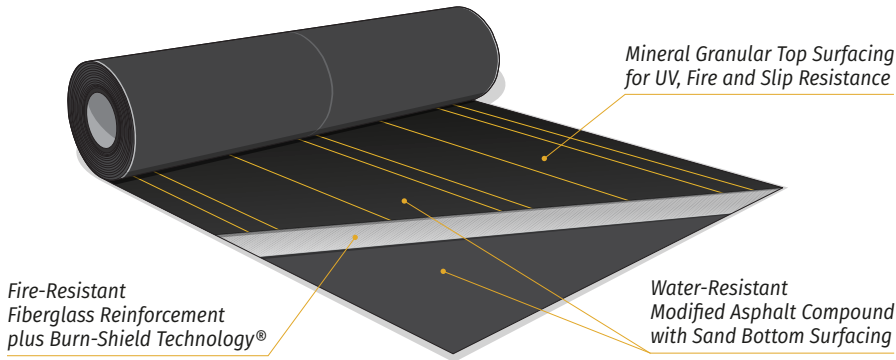

Eagle Anchor XFR by Polyglass® delivers top tier fire resistance in a single layer while providing a waterresistant sheet, unlike the typical multiple-layer methods. This efficiency reduces labor and material costs, providing significant savings to building owners and contractors.

Product Data*—Eagle Part No: 8165

Net Coverage (Approx)	200 ft ² (18.5 m ²)
Gross Coverage (Approx)	215 ft ² (20 m ²)
Weight (Approx)	78 lbs (35.5 kg)
Thickness (Nominal)	63 mils (1.6 mm)
Roll Size	65'8" × 39 3/8" (20 m × 1 m)
Rolls/Pallet	25

*All values are nominal at time of manufacturing

Applicable Standards

UL Classified
CalFire listed: 8180-2305:0504, 8180-2305:0503
ASTM E108/UL790, Class A Fire-Resistance**
ASTM D4601 (II)
ASTM D6757
Meets the physical requirements of ASTM-D226 Type (I) & (II)

**Refer to published Polyglass UL Listing TGDY.R25992 for specific fire rated assemblies.

Class A Rating Layer Requirements

Deck	Underlayment	Roof Covering	Slope
Plywood (15/32") spaced Sheathing	Eagle Anchor XFR mechanically fastened	Approved clay/concrete tile roof coverings*	Unlimited

* Refer to published Polyglass Calfire BMS listing 8180-2305:0504 for specific fire rated assemblies.

Deck	Underlayment	Roof Covering	Slope
As listed by shingle manufacturer	Eagle Anchor XFR mechanically fastened	Any UL Listed Class A asphalt glass fiber mat shingles**	As listed by shingle manufacturer

**Refer to published Polyglass UL listing TGDY.R25992 for specific fire rated assemblies.



For more information on Eagle Anchor XFR, visit: eagleroofing.com/eagle-anchor-xfr

Eagle Anchor XFR is a product of Eagle Roofing Products "Secure Roof Components" line and is manufactured by Polyglass®.

connect with us!



eagleroofing.com

